



EXPOSITOR REFRIGERADO AGPA/ARPA-ARA-125



docriluc

Ctra. Córdoba - Málaga Km. 75,8
Tlfs: +34 957 510 126 Fax: +34 957 510 682
14900 LUCENA (Córdoba), Spain
info@docriluc.es
www.docriluces.com



GENERAL CATALOGUE

CARACTERÍSTICAS GENERALES

GENERAL FEATURES

- BB = Exterior e interior en acero plastificado blanco
- NN = Exterior e interior en acero plastificado negro
- Estantes de alambre de acero plastificado, dotación 8 unidades (modelos ARPA /AGPA)
- Estantes planos de acero plastificado, dotación 8 unidades (modelos ARA)
- Puertas batientes de aluminio con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Evaporador ventilado pintado en con recubrimiento anticorrosión
- Estantes regulables en altura
- Desescarche natural para modelos refrigeración, desescarche por resistencias para modelos mantenimiento congelados
- Bandeja de evaporación automática
- Control electrónico
- Iluminación LED 24v 6500k en montantes
- Temperatura de producto, según EN-ISO-23953:
 - a. M1: -1°+5°C, apropiado para bebidas, lácteos, delis y embutidos (modelos ARA, ARPA, AGPA)
 - b. L1: -15°-18°C, apropiado para producto congelado (MODELOS ARAC, ARPAC)
- Clase climática 3 (25°C, 60 H.R)

- BB = Exterior and interior in white plastic coated steel
- NN = Exterior and interior in black plastic coated steel
- Plastic-coated steel wire shelves, supply of 8 units (ARPA /AGPA models)
- Flat plastic-coated steel shelves, supply of 8 units (ARA models)
- Aluminum swing doors with automatic closing system and magnetic weatherstripping (remains open when opening beyond 90°)
- Ventilated evaporator painted in with anti-corrosion coating
- Height adjustable shelves
- Natural defrost for refrigeration models, defrost by resistances for frozen maintenance models
- Automatic evaporation tray
- Electronic control
- 24v 6500k LED lighting on collums
- Product temperature, according to EN-ISO-23953:
 - a. M1: -1°+5°C, suitable for beverages, dairy products, delis and sausages (ARA, ARPA, AGPA models)
 - b. L1: -15°-18°C, appropriate for frozen product (ARAC, ARPAC, MODELS)
- Climate class 3 (25°C, 60 H.R.)

OPCIONALES

OPTIONALS

Exterior negro

Interior negro

Black exterior

Black interior

docriluc

Ctra. Córdoba - Málaga Km. 75,8
Tlfs: +34 957 510 126 Fax: +34 957 510 682
14900 LUCENA (Córdoba), Spain
info@docriluc.es
www.docriluces.com




GENERAL CATALOGUE

DATOS TÉCNICOS TECHNICAL INFORMATION

Modelo / Model	ARPA-125	ARPAC-125	AGPA-125	ARA-125	ARAC-125
Rango temperatura / Temperatura Range	M1	L1	M1	M1	L1
Clase Climática / Climatic class	3	3	3	3	3
Medidas exteriores / External dimensions (LxWxH)mm	1250 x 2040 x 700	1250 x 2040 x 700	1250 x 2040 x 700	1250 x 1935 x 700	1250 x 1935 x 700
Medidas embaladas / Packed dimensions (LxWxH)mm	1280 x 2190 x 730	1280 x 2190 x 730	1280 x 2190 x 730	1280 x 2085 x 730	1250 x 2085 x 700
Volumen interior / Inside volume (L)	1000	1000	1000	669	669
Pot. Frigorífica / Frig. Power	851	833	851	543	833
Pantalla publicidad / Canopy	-	-	SI / YES	-	-
Puertas / Doors	2	2	2	2	2
Estantes / Shelves	8	8	8	8	8
Consumo Energético / Energy consumption (W)	671	828	671	434	828
Tensión - Frecuencia / Tension Frequency	230V 50/60 Hz	230V 50/60 Hz	230V 50/60 Hz	230V 50/60 Hz	230V 50/60 Hz
Refrigerante / Refrigerant	R-290	R-290	R-290	R-290	R-290
Iluminación Led / Led lighting	4000K	4000K	4000K	4000K	4000K
Agente expansor / Expanding agent	HFO	HFO	HFO	HFO	HFO
Tipo evaporación / Evaporation type	Ventilado	Ventilado	Ventilado	Ventilado	Ventilado
Tipo condensación / Condensation type	Ventilada	Ventilada	Ventilada	Ventilada	Ventilada
Controlador / Controller	ELITECH ECS6011	ELITECH ECS6011	ELITECH ECS6011	ELITECH ECS6011	ELITECH ECS6011
Nº Mangueras / Num. Of power cord	1	1	1	1	1




SECCIONES

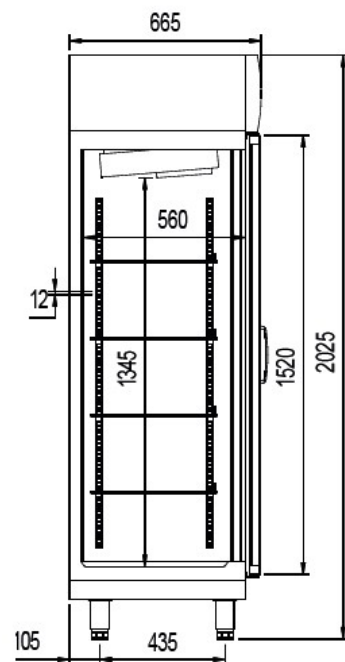

AGPA-125


SECTIONS

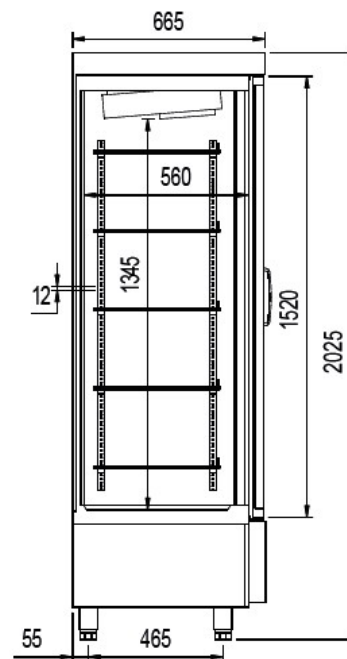

ARPA-ARA-ARAC-125

VISTAS PLANTA

FLOOR VIEWS

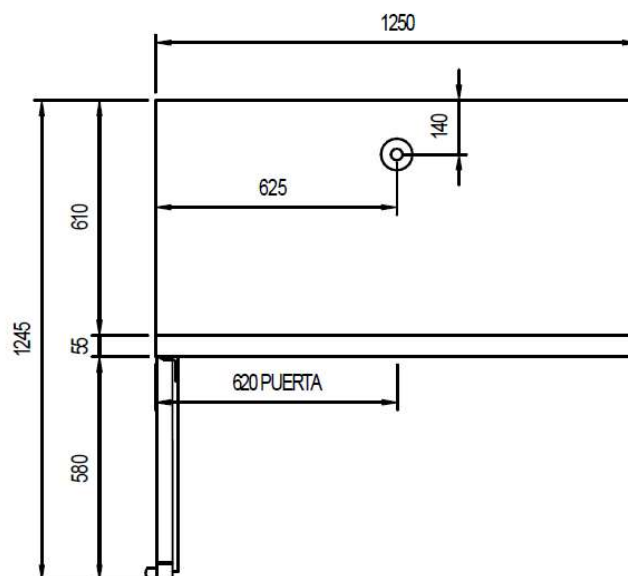

docriluc

Ctra. Córdoba - Málaga Km. 75,8
Tlfs: +34 957 510 126 Fax: +34 957 510 682
14900 LUCENA (Córdoba), Spain

info@docriluc.es
www.docriluc.es



GENERAL CATALOGUE