



GAMA CEDAR FONDO 0 (653 MM)

CEDAR DEPTH 0 (653 MM)

- Mueble vertical grupo incorporado con capacidad y visibilidad optimizada del producto
- Vertical cabinet with built-in refrigeration unit, optimized for product capacity and visibility



docriluc

Ctra. Córdoba - Málaga Km. 75,8
Tlfs: +34 957 510 126 Fax: +34 957 510 682
14900 LUCENA (Córdoba), Spain
info@docriluc.es
www.docriluc.es



GENERAL CATALOGUE

CARACTERÍSTICAS GENERALES

GENERAL FEATURES

- Mueble vertical grupo incorporado con capacidad y visibilidad optimizada del producto
- Diferentes tipos de laterales:
 - a) ABS con vidrio doble.
 - b) LC. Lateral ciego espejo interior.
 - c) LV. Lateral ventana con vidrio doble.
 - d) LE. Lateral panorámico vidrio doble, serigrafiado en negro.
- Gran posibilidad de personalización.
- Interior en acabado blanco RAL 9003. Opción negro RAL 9005 sin incremento de precio.
- Modelo INOX: Interior y exterior en acero INOX AISI-304
- Aislamiento de poliuretano inyectado, densidad 40kg/m³ bajo GWP y cero efecto ODP.
- El paragolpes de tubo es opcional en todos los modelos. (no incluido de serie)
- DS: Modelo con cortina de noche manual y frente cuba inferior de metacrilato.
- H1: Modelo de verduras con tope de metacrilato frontal en estantes y espejo superior.
- Estantes regulables en altura y ángulo, con portaprecios de 40 mm incluidos.
- Patas reguladoras de altura.
- Evaporador ventilado con recubrimiento EPOXI anticorrosión.
- Unidad condensadora Ventilada.
- Desescarche natural del evaporador.
- Bandeja de evaporación automática.
- Ventiladores electromecánicos, opcional electrónicos (consultar)
- Control electrónico.
- Iluminación LED 24v 4000k en visera (iluminación vertical solo en modelos DG)
- Modelos preinstalación incorporan valvulería solenoide y expansión termostática en R-449A, opción R-134a (consultar otros refrigerantes).
- Temperatura de producto, según EN-ISO-23953:
 - -M2: -1^º+7^ºC, apropiado para lácteos, delis y embutidos.
 - -H1: +1^º+10^ºC, apropiado para frutas y verduras.
- Clase climática 3 (25^ºC, 60 H.R).
- Tensión de trabajo monofásica 220V 50Hz
- Tensión de trabajo monofásica 115V 60Hz o 220v 60Hz (consultar)
- Gas refrigerante R-290

- Vertical cabinet with built-in refrigeration unit, optimized for product capacity and visibility.
- Various side panel types:
 - a) ABS with double-glass.
 - b) LC: Solid side panel with internal mirror.
 - c) LV: Windowed side panel with double-glass.
 - d) LE: Panoramic double-glass side panel, black screen-printed.
- Highly customizable.
- Interior in white finish RAL 9003. Black RAL 9005 option available at no extra cost.
- INOX model: Interior and exterior in AISI-304 stainless steel.
- Injected polyurethane insulation, 40 kg/m³ density, low GWP and zero ODP impact.
- Optional tube bumper available for all models (not included as standard)
- DS: Model with manual night curtain and lower tank front in methacrylate.
- H1: Produce model with front methacrylate stop on shelves and upper mirror.
- Height- and angle-adjustable shelves with 40 mm price holders included.
- Height-adjustable feet.
- Ventilated evaporator with anti-corrosion EPOXY coating.
- Ventilated condensing unit.
- Natural defrost for the evaporator.
- Automatic evaporation tray.
- Electromechanical fans; electronic fans optional (upon request).
- Electronic control.
- 24V 4000K LED lighting in the canopy (vertical lighting only in DG models).
- Pre-installation models include solenoid valve and thermostatic expansion valve for R-449A; R-134a option available (other refrigerants upon request)
- Product temperature according to EN-ISO-23953:
 - M2: -1°C to +7°C, suitable for dairy, deli, and cold cuts.
 - H1: +1°C to +10°C, suitable for fruits and vegetables.
- Climate class 3 (25°C, 60% RH).
- Operating voltage: single-phase 220V 50Hz.
- Operating voltage: single-phase 115V 60Hz or 220V 60Hz (upon request).
- R-290 refrigerant gas

OPCIONALES

OPTIONALS

Decoración frontal	Total decoración	Total decoración alto brillo	Tope estante metacrilato	Paragolpes tubo inox.	Iluminación LED x nivel de estantes	Pre instalación
Front decor	Total decor	Total decor high gloss	Methacrylate shelf stopper	Stainless Steel bumper	LED lighting x shelves level	Remote Unit

docriluc

Ctra. Córdoba - Málaga Km. 75,8
Tlfs: +34 957 510 126 Fax: +34 957 510 682
14900 LUCENA (Córdoba), Spain

info@docriluc.es
www.docriluces.com



GENERAL CATALOGUE

DATOS TÉCNICOS


TECHNICAL INFORMATION

Modelo / Model	DS0 06	DS0 09	DS0 12	DS0 15	DS0 18	DS0 25
Rango temperatura / Temperatura Range	M2 ó H1	M2 ó H1	M2 ó H1	M2 ó H1	M2 ó H1	M2 ó H1
Clase Climática / Climatic class	3	3	3	3	3	3
Medidas exteriores / External dimensions (LxWxH)mm	685 x 654 x 2000	998 x 654 x 2000	1310 x 654 x 2000	1623 x 654 x 2000	1935 x 654 x 2000	2560 x 654 x 2000
Medidas embaladas / Packed dimensions (LxWxH)mm	745 x 775 x 2155	1053 x 775 x 2155	1365 x 775 x 2155	1680 x 775 x 2155	1990 x 775 x 2155	2665 x 775 x 2155
Volumen interior / Inside volume (L) M2	255	392	510	668	784	1020
Volumen interior / Inside volume (L) H1	239	368	480	628	737	959
TDA (m2) M2	0,87	1,32	1,72	2,10	2,58	3,38
TDA (m2) H1	0,83	1,25	1,62	2,01	2,48	3,18
Sup. Exposición / Display área (m2) M2	1,00	1,50	2,00	2,50	3,00	4,00
Sup. Exposición / Display área (m2) H1	0,81	1,21	1,61	2,02	2,42	3,23
Pot. Frigorífica / Frig. Power (w) M2	1192	1528	1931	2384	3056	3862
Pot. Frigorífica / Frig. Power (w) H1	1192	1528	1931	2384	3056	3862
Puertas / Doors	-	-	-	-	-	-
Consumo Energético / Energy consumption (Kw./24h) M2	12,1	14,4	16,64	19,62	24,32	31,05
Consumo Energético / Energy consumption (Kw./24h) H1	10,98	13,14	14,78	17,52	22,05	25,40
Tensión – Frecuencia / Tension Frequency	220V 50 Hz / 115V 60 Hz (consultar)	220V 50 Hz / 115V 60 Hz (consultar)	220V 50 Hz / 115V 60 Hz (consultar)	220V 50 Hz / 115V 60 Hz (consultar)	220V 50 Hz / 115V 60 Hz (consultar)	220V 50 Hz / 115V 60 Hz (consultar)
Refrigerante / Refrigerant	R-290	R-290	R-290	R-290	R-290	R-290
Iluminación Led / Led lighting	4000K	4000K	4000K	4000K	4000K	4000K
Agente expansor / Expanding agent	HFO	HFO	HFO	HFO	HFO	HFO
Tipo evaporación / Evaporation type	Ventilado	Ventilado	Ventilado	Ventilado	Ventilado	Ventilado
Tipo condensación / Condensation type	Ventilado	Ventilado	Ventilado	Ventilado	Ventilado	Ventilado
Controlador / Controller	Carel PJEASY	Carel PJEASY	Carel PJEASY	Carel PJEASY	Carel PJEASY	Carel PJEASY
Nº Mangueras / Num. Of power cord	1	1	1	1	2	2




SECCIONES

SECTIONS

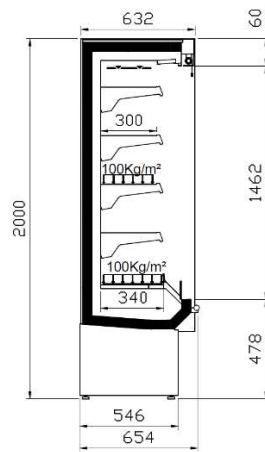

DS0 M2

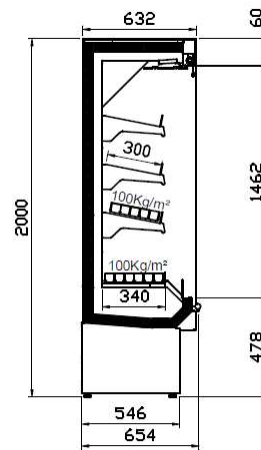


DS0 H1


VISTAS PLANTA

FLOOR VIEWS


DG0 06




DS0 09




DS0 12



DS0 15



DS0 18



DS0 25

