



**EXPOSITOR
REFRIGERADO
EVR/EVRF-710**



docriluc

Ctra. Córdoba - Málaga Km. 75,8
Tlfs: +34 957 510 126 Fax: +34 957 510 682
14900 LUCENA (Córdoba), Spain
info@docriluc.es
www.docriluces.es



GENERAL CATALOGUE

CARACTERÍSTICAS GENERALES

- BB = Exterior e interior en acero plastificado blanco
- NN = Exterior e interior en acero plastificado negro
- EA = Exterior e interior en acero plastificado, puerta ciega
- Diseñados para bebidas y productos envasados
- Estantes de alambre de acero plastificado, regulables en altura
- Compresor hermético alto par de arranque
- Evaporador ventilado impreso en placa de aluminio
- Control digital de temperatura y descarches
- Iluminación interior LED
- Unidad condensadora estática libre de mantenimiento
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, bajo GWP y cero efecto ODP
- Evaporación automática del agua de descarche
- EVR: Temperatura de funcionamiento K1(0+7°C), clase climática CC2(32°C 65%HR), según EN22044
- EVRF: Temperatura de funcionamiento C1(-18°C-16°C), clase climática 4 (30°C, 55%HR)
- Tensión monofásica 230V 50Hz
- Refrigerante R-290

GENERAL FEATURES

- BB = Exterior and interior in white plastic coated steel
- NN = Exterior and interior in black plastic coated steel
- EA = Exterior and interior in plastic-coated steel, solid door
- Designed for beverages and packaged products
- Shelves plastic coated steel wire, adjustable height
- Hermetic compressor high starting torque
- Ventilated evaporator printed on aluminum plate
- Digital temperature control and defrost
- Interior lighting LED
- Static condensing unit, maintenance-free
- Injected polyurethane insulation, density 40 Kg/m³, low GWP and zero ODP effect
- Automatic evaporation of defrost water
- EVR: Operating temperature K1 (0 + 7°C), climatic class CC2 (32°C 65% RH), according to EN22044
- EVRF: Operating temperature C1 (-18°C-16°C), climatic class 4 (30°C, 55%HR)
- Voltage 230V 50Hz
- Refrigerant R-290

OPCIONALES

Exterior negro

Black exterior

OPTIONALS

Interior negro

Black interior

docriluc

Ctra. Córdoba - Málaga Km. 75,8
Tlfs: +34 957 510 126 Fax: +34 957 510 682
14900 LUCENA (Córdoba), Spain
info@docriluc.es
www.docriluces.com



GENERAL CATALOGUE


DATOS TÉCNICOS TECHNICAL INFORMATION

Modelo / Model	EVR-710	EVRF-710	EVR-710-EA	EVRF-710-EA
Rango temperatura / Temperatura Range	K1	C1	K1	C1
Clase Climática / Climatic class	CC2	4	CC2	4
Medidas exteriores / External dimensions (LxWxH)mm	707 x 1962 x 660	707 x 1962 x 660	707 x 1962 x 660	707 x 1962 x 660
Medidas embaladas / Packed dimensions (LxWxH)mm	720 x 2110 x 715	720 x 2110 x 715	720 x 2110 x 715	720 x 2110 x 715
Volumen interior / Inside volume (L)	549	549	549	549
Pot. Frigorífica / Frig. Power	236	296	236	296
Pantalla publicidad / Canopy	-	-	-	-
Facing lata 33 cl / 33 cl Facing	8	8	8	8
Capacidad latas 33 cl / 33 cl can capacity	448	448	448	448
Puertas / Doors	1	1	1	1
Consumo Energético / Energy consumption (W)	189	236	189	236
Tensión - Frecuencia / Tension Frequency	230V 50/60 Hz	230V 50/60 Hz	230V 50/60 Hz	230V 50/60 Hz
Refrigerante / Refrigerant	R-290	R-290	R-290	R-290
Iluminación Led / Led lighting	4000K	4000K	4000K	4000K
Agente expansor / Expanding agent	HFO	HFO	HFO	HFO
Tipo evaporación / Evaporation type	Ventilado	Estática	Ventilado	Estática
Tipo condensación / Condensation type	Estática	Estática	Estática	Estática
Controlador / Controller	ELITECH ECS6011	ELITECH ECS6011	ELITECH ECS6011	ELITECH ECS6011
Nº Mangueras / Num. Of power cord	1	1	1	1



SECCIONES

SECTIONS

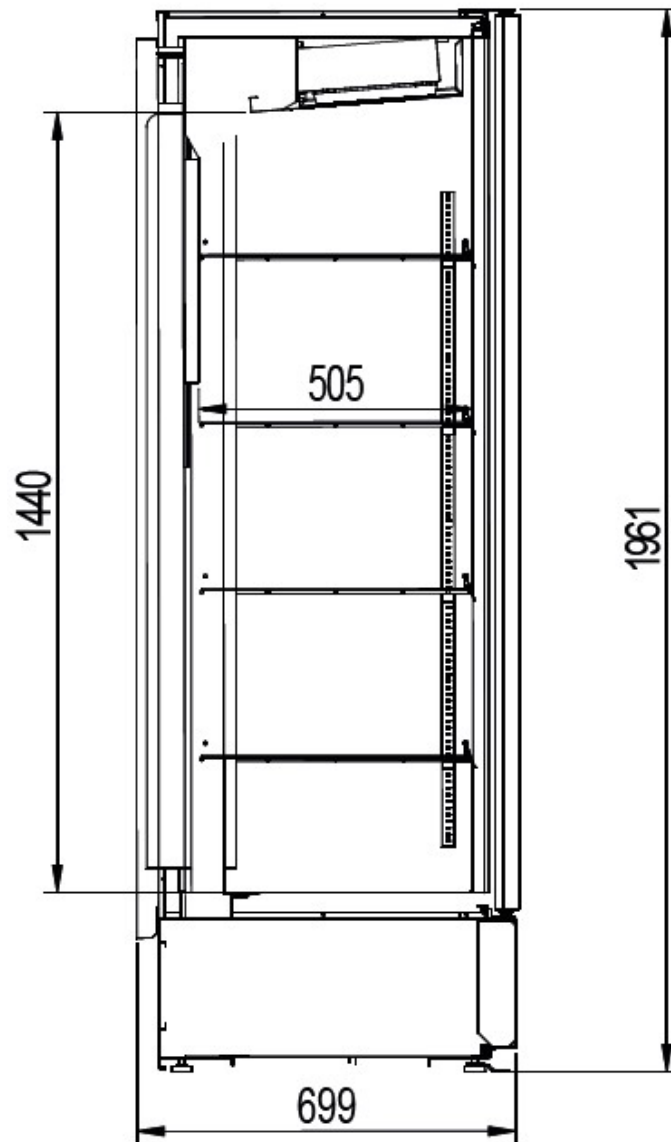

docriluc

Ctra. Córdoba - Málaga Km. 75,8
Tlfs: +34 957 510 126 Fax: +34 957 510 682
14900 LUCENA (Córdoba), Spain
info@docriluc.es
www.docriluces.com



GENERAL CATALOGUE